




# ALLOY MASTER LINK

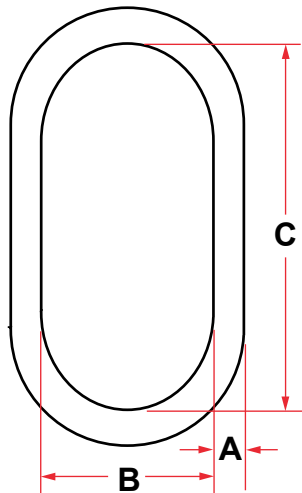

- Quenched & Tempered Alloy Steel
- Unless noted otherwise, each link is individually proof tested to values shown on the certificate. Proof tested according to ASTM A952 to avoid localized point loading.
- Each link is shipped with a proof test certificate.
- Sizes 2" and under are drop forged. Sizes over 2" are welded and magnetic particle inspected.

Never Exceed Working Load Limit.

SIZE A (INCHES)	WEIGHT (LBS.)			DIMENSIONS (INCHES)	
	WORKING LOAD LIMIT	PROOF LOAD	WEIGHT EACH	B	C
1/2	7000	14000	0.82	2.50	5.00
5/8	9000	18000	1.52	3.00	6.00
3/4	12300	24600	2.07	2.75	5.50
1	24360	48700	4.85	3.50	7.00
1-1/4	36200	72400	9.57	4.38	8.75
1-1/2	54300	113200	16.22	5.25	10.50
1-3/4	84900	169800	25.22	6.00	12.00
2	102600	205200	37.04	7.00	14.00
2-1/4	143100	289200	54.10	8.00	16.00
2-1/2	160000	320000	67.75	8.00	16.00
2-3/4	216900	433800	87.70	9.50	16.00
3	228000	456000	115.00	9.00	18.00
3-1/4	262200	524400	145.00	10.00	20.00
3-1/2	279000	558000	200.00	12.00	24.00
3-3/4	336000	672000	198.00	10.00	20.00
4	373000	746000	228.00	10.00	20.00
4-1/4	354000	708000	302.00	12.00	24.00
4-1/2	360000	720000	345.00	14.00	28.00
4-3/4	389000	778000	436.00	14.00	28.00
5	395000	790000	516.00	15.00	30.00